

Figaro


Agate
FIG024




Aubergine
FIG025



Bisque
FIG006

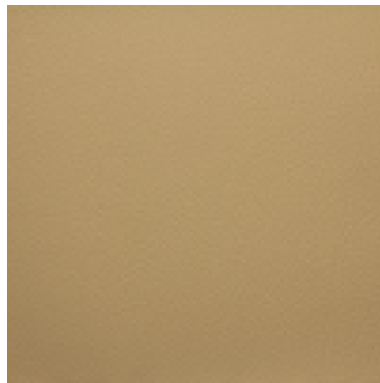

Brick
FIG019

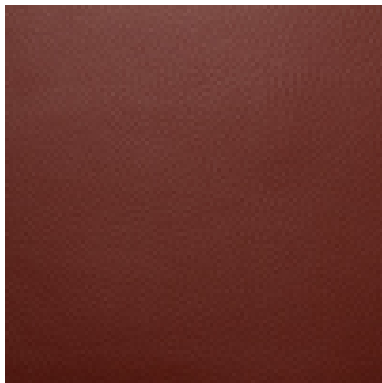


Cafe
FIG021




Chocolate
FIG009



Citron
FIG014

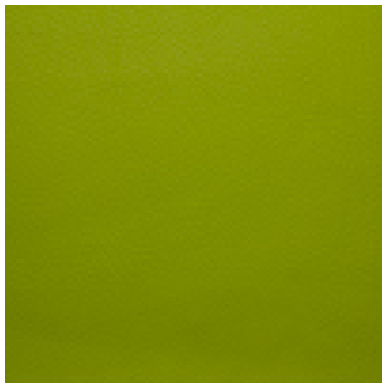

Cobalt
FIG002

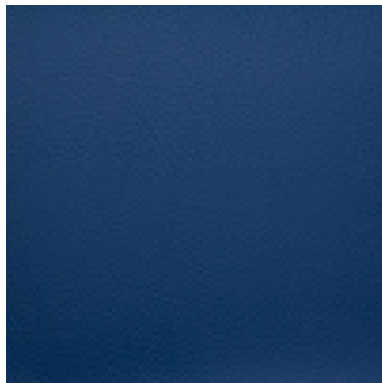

Cocoa
FIG007



Forest
FIG011



Glacier
FIG015




Heather
FIG023




Mallard
FIG018



Mushroom
FIG022

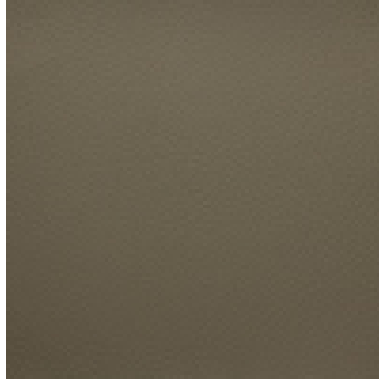


Orchid
FIG016

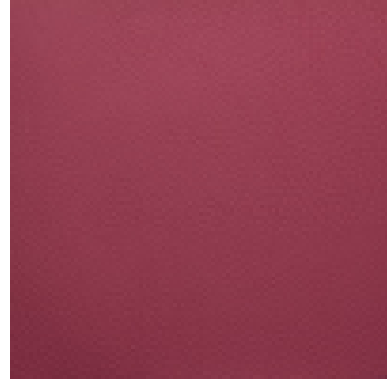

Putty
FIG005



Raven
FIG001

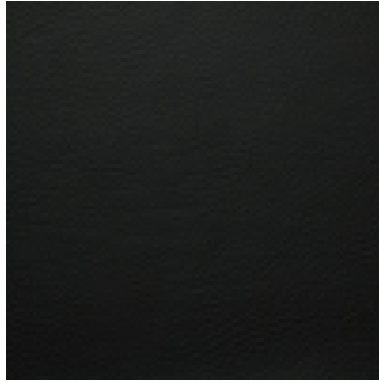


Rioja
FIG020



Scarlet
FIG004




Steely
FIG010

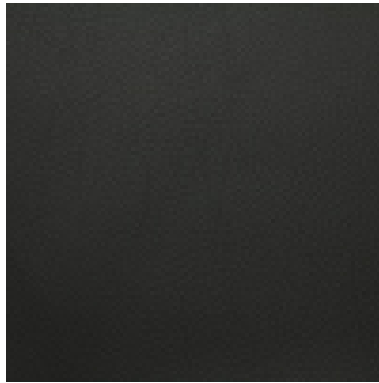

Sunbeam
FIG013



Twilight
FIG003

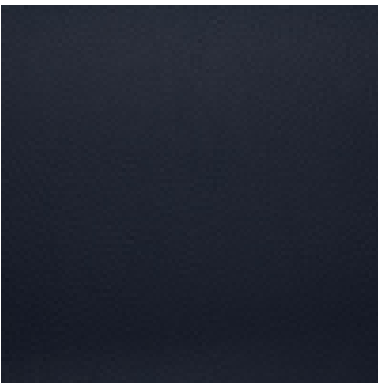

Tyrian
FIG008



Vermillion
FIG012



Zest
FIG017



Application:

Upholstery Fabric

Composition:

85% Polyvinyl Chloride, 13% Cotton, 2% Polyurethane

Width:

140cm + 2%

Weight:

795 gms/m²

Abrasion:

BS EN ISO 5470-2 : 2003 Method 1 120,000 Rubs

Flame Retardancy:

BS 7176: 2007 Low Hazard

BS 7176: 2007 Medium Hazard

BS EN 1021-1 : 2006 (Cigarette)

BS EN 1021-2 : 2006 (Match)

BS 5852: Section 4 Ignition Source 5

Note: Flammability Performance is dependent on foam used.

Bursting Strength:

BS EN ISO 13938-1 : 1999

Bursting Strength of Knitted backing 711 kPa

Light Fastness:

BS EN ISO 105-BO2 : Method 3 to Standard 6 - 6+

Sea Water Fastness:

BS EN ISO 105 - EO2 : 1996 - 5

Fastness to Rubbing Wet & Dry:

BS EN ISO 105 - X12 : 2002 - Lengthways 5, Widthways 5 (Wet & Dry)

Antibacterial/Antimicrobial Resistant

The fabric has been tested and is resistant to the following :

Eshrichia coli, Staphylococcus aureus (MRSA) Salmonella choleraesuis, Aspergillus niger, Chatemoium globosum, Cladosporium herbarum.

AATCC 147:2004 - Qualitative test for determination of the antibacterial effectiveness

AATCC 30-1999 - PartII Qualitative test for determination of the antimycotic effectiveness.

AATCC 30-1999-PartIII Qualitative test for determination of the antimycotic effectiveness.

SAN BIO-12/94 - Qualitative test for determination of the antimycotic effectiveness.

Waterproofing:

Hydrostatic Head (index mode) BS 3424 : Part 26 Method 29C

After Flexing - Length > 200 cms, After Flexing Width > 200 cms

Water or oil based solutions will not penetrate or absorb into the fabric at 2.0 Head Height

Resistant to:

Blood and urine

Fabric Maintenance:

For removal of day to day dirt and spillages, wipe clean with warm soapy water, using a soft damp cloth. Avoid using abrasive cleaners or brushes and do not use solvents or aerosol sprays.

For more stubborn/extreme soiling use a 5% sodium hypochlorite (bleach) solution, Chlor Clean or Haz Tabs.

Product Development:

We reserve the right to change the specification of our products in line with our product development program without notice.

Colour Matching:

Batch to batch variations in shade may occur within commercial tolerances. We recommend that fabric be examined before use as no claims will be considered after cutting.

Availability:

Generally ex-stock.

Guarantee:

Fabric guaranteed for 3 years under normal wear and tear. See our Terms and Conditions