


Nevada

Caesars
P600



Circus
P607

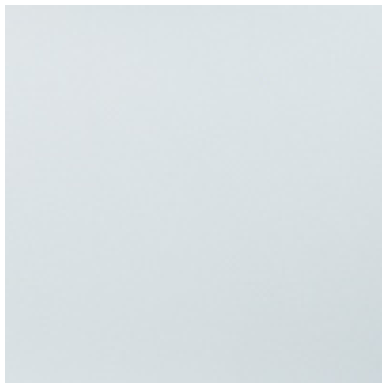

Luxor
P618




Mandalay
P604




Mirage
P690



Venetian
P625

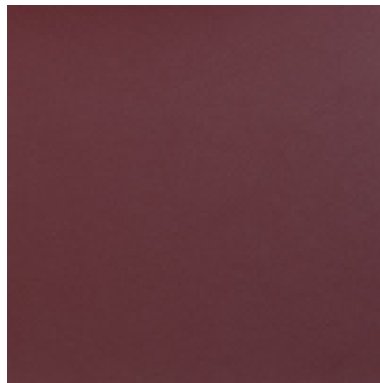

Wynn
P623

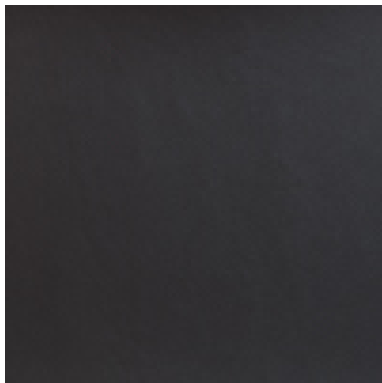

Application:

Upholstery faux leather suitable for soft seating

Composition:

Face- 100% Polyurethane

Backing-67% Polyester, 33% Cotton

Width:

140 cms + 2% usable

Weight:

446 gms/m2 (uncoated)

Abrasion:

BS EN ISO 5470-2 : 2003 Method 1 >200,000 Rubs

Flame Retardancy:

BS EN 1021 – 1: 2006 (Cigarette)

BS EN 1021 – 2 (Match)

BS 7176: 2007 Low Hazard

BS 7176: 2007 Medium Hazard

BS 5852: Section 4 Ignition Source 5

Note: Flammability performance is dependent on foam used.

Note: NEVADA QUILTED meets Low Hazard FR standards, therefore we recommend that a Crib 5 interliner is used to enhance its FR properties.

Tensile Strength:

BS EN ISO 13934-1 : 1999

Lengthway 90N, Widthway 100N

Tear Resistance:

BS EN ISO 13927-2 : 2000

Torn across length 40N, Torn across width 60N

Light Fastness:

BS EN ISO 105 – B02 : Method 3 to Standard – 4

Fastness to Rubbing:

BS EN ISO 105 – X12 : 2002

Wet & Dry:

4-5 (Wet & Dry)

Colour Matching:

Batch to batch variations in shade may occur within commercial tolerances. We recommend that fabric be examined before use as no claims will be considered after cutting.

Availability:

Generally ex stock

Product Development:

We reserve the right to change the specification of our products in line with our product development program without notice.

Fabric Care and Maintenance:

Remove any spillages or stains with a damp cloth. Please refer to our cleaning and maintenance guide for additional details.

Technical Assistance:

Our Technical staff will be pleased to offer advice on F.R. and all other technical matters.

* These colours are also available in the Navada Quilted range.