


Blenheim Check


Aphid
752




Eggplant
741

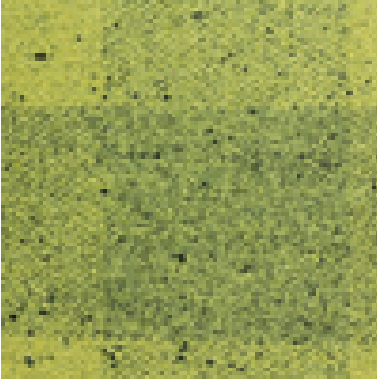


Fallow
755

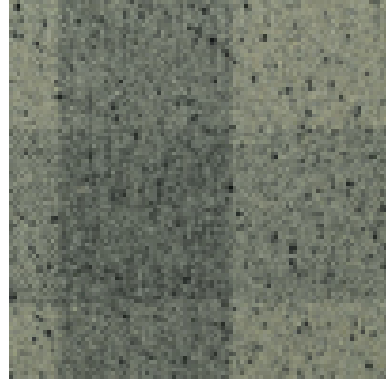


Houston
742

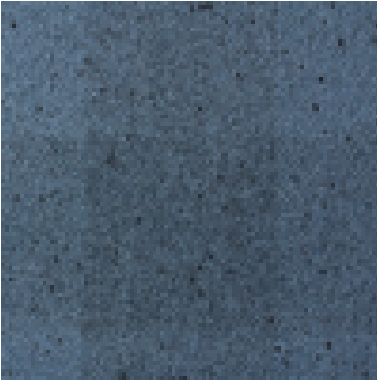


Nutmeg
754

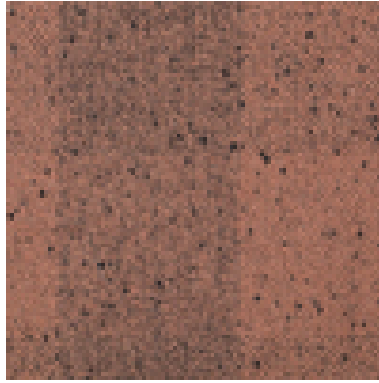


Sahara
757

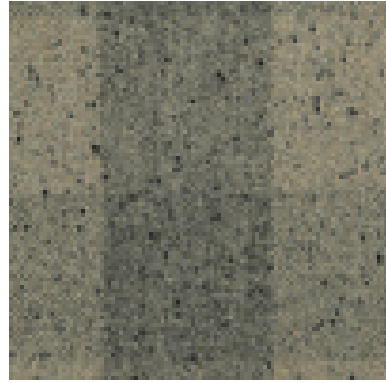

Seal
756

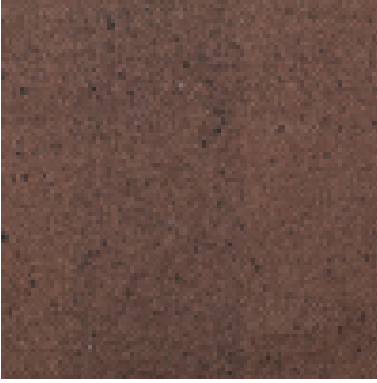

Shadow
738

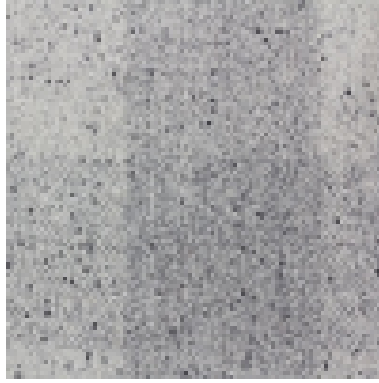

Application:

Upholstery fabric suitable for soft and restaurant style seating

Composition:

90% Wool, 10% Nylon

Width:

140 cms + 2% usable

Weight:

520 gms/m² (730gms/linear m)

Abrasion:

BS EN ISO 5470-2 : 2003 Method 1 > 170,000 Rubs

Flame Retardancy:

BS EN 1021 – 1: 2006 (Cigarette)

BS EN 1021 – 2: 2006 (Match)

BS 7176: 2007 Low Hazard

Note: Flammability performance is dependent on foam used.

Additional Zirpro treatment required, please specify when ordering

BS7176: 2007 Medium Hazard

BS5852: Section 4 Ignition Source 5

Teflon Treated:

Superior stain resistance and water repellancy with inherent Teflon treatment

Tensile Strength:

BS EN ISO 13934-1 : 1999

BLENHHEIM CHECK: Lengthway 690N, Widthway 380N

Tear Resistance:

BS EN ISO 13937-2 : 2000

Torn across length 40N, Torn across width 45N

Light Fastness:

BS EN ISO 105 – BO2 : Method 3 to Standard – 4

Fastness to Rubbing:

BS EN ISO 105 – X12 : 2002 – 4-5 (Wet & Dry)

Colour Matching:

Batch to batch variations in shade may occur within commercial tolerances. We recommend that fabric be examined before use as no claims will be considered after cutting.

Availability:

Generally ex stock

Product Development:

We reserve the right to change the specification of our products in line with our product development program without notice.

Fabric Care and Maintenance:

Vacuum regularly to remove dust and any surface soiling. Use a damp cloth with warm water for more stubborn staining or soiling. Please refer to our cleaning and maintenance guide for additional details.

Technical Assistance:

Our Technical staff will be pleased to offer advice on F.R. and all other technical matters.