


# Blenheim Check


Aphid  
752




Eggplant  
741

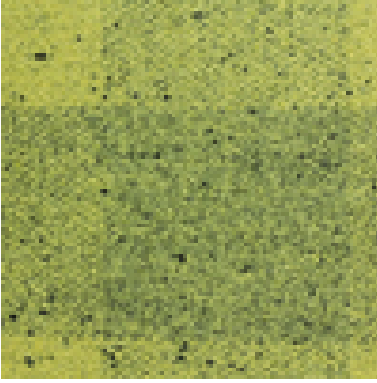


Fallow  
755

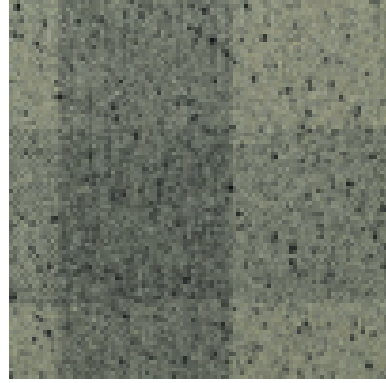


Houston  
742

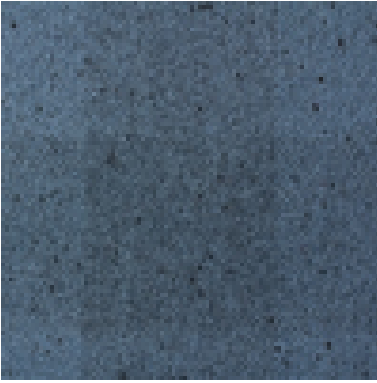

Nutmeg  
754

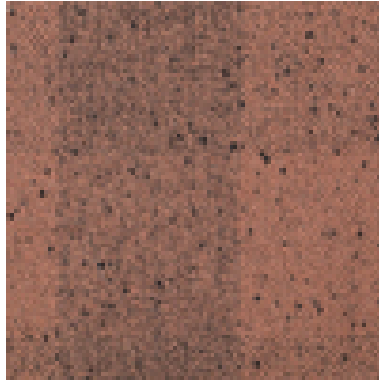


Sahara  
757

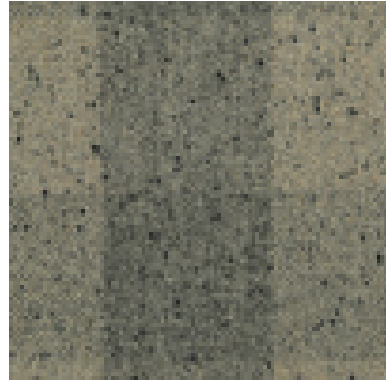

Seal  
756



Shadow  
738

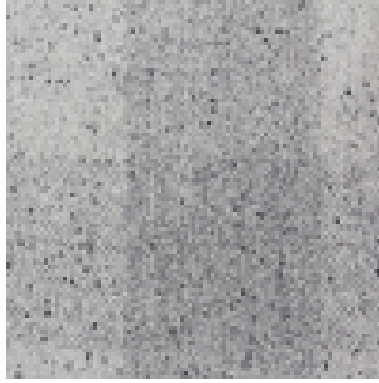

**Application:**

Upholstery fabric suitable for soft and restaurant style seating

**Composition:**

90% Wool, 10% Nylon

**Width:**

140 cms + 2% usable

**Weight:**

520 gms/m<sup>2</sup> (730gms/linear m)

**Abrasion:**

BS EN ISO 5470-2 : 2003 Method 1 > 170,000 Rubs

**Flame Retardancy:**

BS EN 1021 – 1: 2006 (Cigarette)

BS EN 1021 – 2: 2006 (Match)

BS 7176: 2007 Low Hazard

Note: Flammability performance is dependent on foam used.

**Additional Zirpro treatment required, please specify when ordering**

BS7176: 2007 Medium Hazard

BS5852: Section 4 Ignition Source 5

**Teflon Treated:**

**Superior stain resistance and water repellancy with inherent Teflon treatment**

**Tensile Strength:**

BS EN ISO 13934-1 : 1999

**BLENHHEIM CHECK: Lengthway 690N, Widthway 380N**

**Tear Resistance:**

BS EN ISO 13937-2 : 2000

Torn across length 40N, Torn across width 45N

**Light Fastness:**

BS EN ISO 105 – BO2 : Method 3 to Standard – 4

**Fastness to Rubbing:**

BS EN ISO 105 – X12 : 2002 – 4-5 (Wet & Dry)

**Colour Matching:**

Batch to batch variations in shade may occur within commercial tolerances. We recommend that fabric be examined before use as no claims will be considered after cutting.

**Availability:**

Generally ex stock

**Product Development:**

We reserve the right to change the specification of our products in line with our product development program without notice.

**Fabric Care and Maintenance:**

Vacuum regularly to remove dust and any surface soiling. Use a damp cloth with warm water for more stubborn staining or soiling. Please refer to our cleaning and maintenance guide for additional details.

**Technical Assistance:**

Our Technical staff will be pleased to offer advice on F.R. and all other technical matters.